



Closer

Electromechanical gearmotor 230V and 24V for rack-driven sliding gates up to 1500 Kg




- Reduced dimensions for easy mounting even with limited space for installation
- Available with electromechanical or magnetic limit switch system (MAG versions)
- Ground fixing plate adjustable in height for accurate and simply installation
- Suitable for domestic or multi-users gates
- 24V version for automatic opening even in case of power failure


		CLOSER 6	CLOSER 5	CLOSER 8	CLOSER 15	CLOSER 5	CLOSER 8	CLOSER 15
Power supply	V	24V dc	230V~50Hz	230V~50Hz	230V~50Hz	115V~60Hz	115V~60Hz	115V~60Hz
Current	A	0,7 - 10	1,2 - 1,7	1,2 - 2,0	3,0	2,0 - 3,2	2,8 - 3,2	6,4 - 6,6
Motor power	W	80	250	300	600	280	330	600
Class protection	IP	44	44	44	44	44	44	44
Revolutions	g/m	1600	1400	1400	1400	1700	1700	1700
Duty Cycle	%	80	40	40	40	40	40	40



Closer 6	24V	5-9 m/min	650 Kg
Closer 5	230V	8,5 m/min	500 Kg
Closer 5 115	115V	11 m/min	500 Kg
Closer 8	230V	8,5 m/min	800 Kg
Closer 8 115	115V	11 m/min	800 Kg
Closer 15	230V	8,5 m/min	1500 Kg
Closer 15 115	115V	11 m/min	1500 Kg
Closer 5 MAG	230V	8,5 m/min	500 Kg
Closer 8 MAG	230V	8,5 m/min	800 Kg
Closer 15 MAG	230V	8,5 m/min	1500 Kg

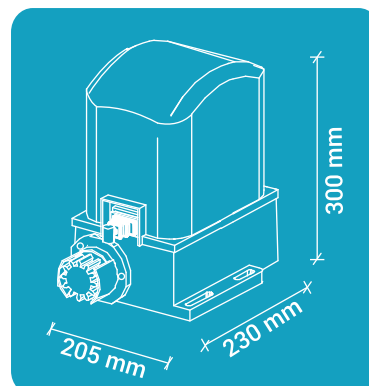

SCHEME ASSEMBLY

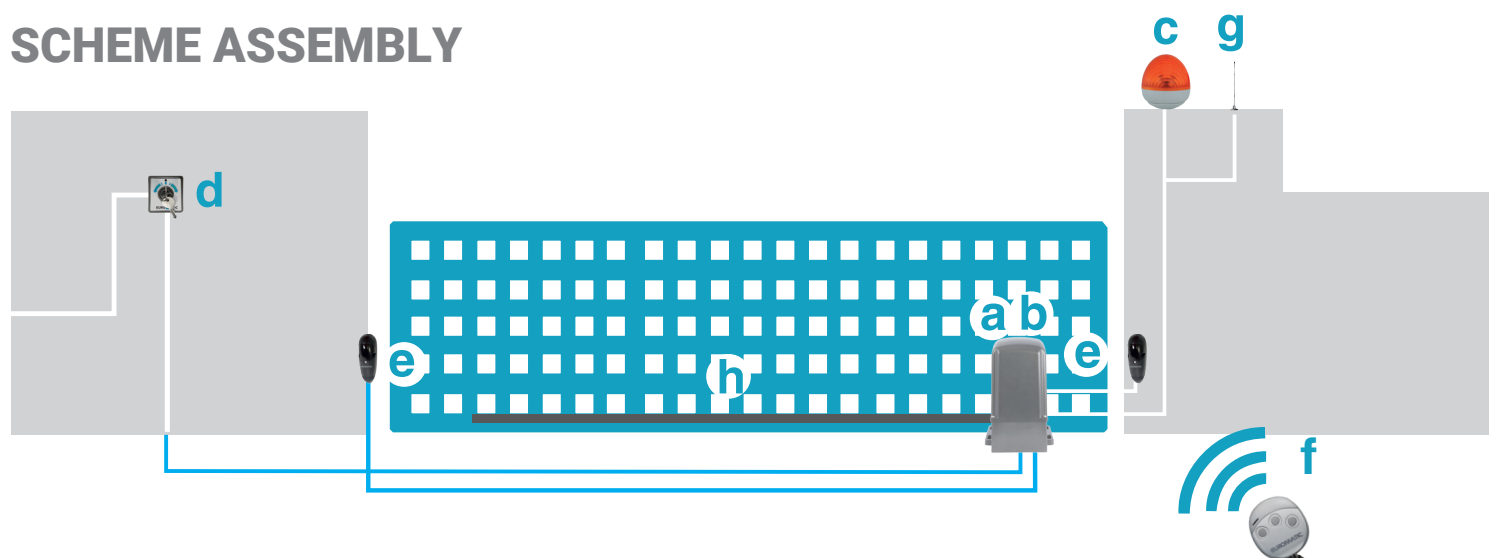

a motor
b control unit

c blinker light
d key switch

e photocells
f transmitter

g aerial (OPT)
h rack

KIT CONTENTS:



Gear motor with control unit
and built-in radio receiver



Photocells set
RF37



Transmitters
JEDI



PVC rack
B120-4m



Blinker light
EGGY



Key switch
ELECTRO



YEARS OF WARRANTY



RELIABLE



SAFE



EASY TO INSTALL
EASY TO BE PROGRAMMED

OPTIONAL ACCESSORIES:



Keypad
D007



Aerial
ANT02



Safety edge
RC23



Steel rack
B102